



NP / REW / REC SERIES

valve regulated sealed lead-acid type rechargeable battery

WHEN THE POWER'S OFF YUASA'S ON

CONSTRUCTION OF YUASA NP BATTERY



- A Top Cover
- B Relief Valve
- C Terminal
- D Sealant
- E Negative Plate
- F Electrolyte Retentive Separator
- G Positive Plate
- H Cover
- I Container

INTRODUCTION

Yuasa began development of the NP Series of maintenance free sealed lead acid batteries in 1958. Today's NP battery is the culmination of over 65 years of battery manufacturing experience. The high energy density, advanced plate technology, fully sealed construction, efficient performance in float or cyclic services, and long service life combine to make Yuasa NP batteries the most reliable and versatile maintenance free rechargeable sealed lead acid batteries available.

TECHNICAL FEATURES

- Sealed Construction
- Electrolyte Suspension System
- Gas Recombination
- Maintenance-Free Operation
- Operation In Any Position
- Low Pressure Venting System
- Heavy Duty Grids
- Low Self Discharge-Long Shelf Life
- Broad Operating Temperature Range
- High Recovery Capability

APPLICATIONS

Yuasa NP series batteries are designed for use in both cyclic and float applications. The high energy density to weight ratio coupled with a wide selection of sizes and configurations make NP batteries the logical choice for numerous applications. A partial list of common applications includes, but is not limited to, standby or primary power for:

- Alarm Systems
- Cable Television
- Communications Equipment
- Control Equipment

- Computers
- Electronic Cash Registers
- Electronic Test Equipment
- Electric Powered Wheelchairs
- Emergency Lighting Systems
- Fire & Security Systems
- Geophysical Equipment
- Marine Equipment
- Medical Equipment
- Micro Processor Based Office Machines
- Portable Gino & Video Lights
- Power Tools
- Solar Powered Systems
- Telecommunications Systems

- Television & Video Recorders
- Toys
- Uninterruptible Power Supplies
- Welding Machine



ISO 9001 QUALITY ASSURANCE



RECOGNIZED BY UL, File NO. MH 12970

(REW) 長壽命高率型 (瓦特) - 設計壽命 5 年


[Long Life & High Rate Type(Watts) - Designed Life is 5 Years for Floating Use]

TYPE	Volts	W/Cell 10min (F.V.1.67V/Cell)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
REW28-12	12	28	90	3.54	70	2.76	106.0	4.17	2.00	4.41	1	B
REW45-12		45	151	5.94	65	2.56	97.5	3.84	2.50	5.51	4	B

(REC) 電動用車系 [Electric Car Application Type]

TYPE	Volts	Nominal Capacity (20 hr rate-AH)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
REC9-12	12	9.0	151	5.94	65	2.56	115.5	4.50	3.40	7.49	4	B
REC10-12		10.0	151	5.94	65	2.56	115.5	4.50	3.40	7.49	4	B
REC12-12		12.0	151	5.94	98	3.86	97.5	3.84	4.00	8.82	4	B
REC22-12		22.0	181	7.13	76	2.99	167.0	6.57	6.50	14.32	2	C
REC50-12		50.0	197	7.76	165	6.50	175.0	6.89	15.00	33.04	2	G
REC80-12		80.0	259	10.20	168	6.61	212.0	8.35	27.00	59.47	1	G
U1-36E-12		36.0	196	7.72	130	5.12	169.0	6.65	11.90	26.20	1	E

Layout

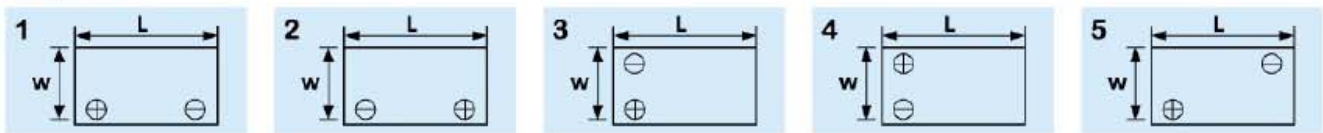

Terminals

A

mm	inch
6.35	0.250
4.70	0.185
3.15	0.124
2.50	0.098
1.50	0.059
0.80	0.031
0.50	0.020
0.10	0.004

Fasten tab: 187

B

mm	inch
7.90	0.310
6.35	0.250
4.00	0.160
0.80	0.031
0.50	0.020
0.10	0.004

Fasten tab: 250

C

mm	inch
12.00	0.472
11.50	0.453
11.00	0.433
5.50	0.216
2.00	0.079

Bolt Type:M5
Tightening Torque:1.96-2.94(Nm)(20-30kgf.cm)

Bolt fastened terminal

D

mm	inch
15.0	0.591
7.5	0.296
5.5	0.217
0.25	0.010

Bolt Type:M5
Tightening Torque:1.96-2.94(Nm)(20-30kgf.cm)

Bolt fastened terminal

E

mm	inch
19.5	0.768
18.0	0.710
9.5	0.370
7.0	0.270
6.0	0.240

Bolt Type:M6
Tightening Torque:3.92-5.61(Nm)(40-55kgf.cm)

Bolt fastened terminal

F

mm	inch
0.05	0.002
0.10	0.004
0.20	0.008
0.25	0.010
0.50	0.020
3.00	0.120
5.00	0.200
8.50	0.340
9.00	0.360
10.00	0.400

G

mm	inch
0.10	0.004
0.20	0.008
0.25	0.010
0.30	0.012
2.50	0.100
4.50	0.180
6.00	0.240
13.50	0.540
19.80	0.792
20.90	0.836

H

mm	inch
0.10	0.004
0.20	0.008
0.25	0.010
2.50	0.100
4.50	0.180
5.00	0.200
8.50	0.340
15.60	0.624
16.90	0.676

(NP) 一般型—設計壽命 3 年〔Standard Type - Designed Life is 3 Years for Floating Use〕

TYPE	Volts	Nominal Capacity (20 hr rate-AH)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
NP1.2-6	6	1.2	97	3.82	25	0.98	54.5	2.15	0.29	0.64	1	A
NP3-6		3.0	134	5.28	34	1.34	64.0	2.52	0.63	1.93	1	A
NP4-6		4.0	70	2.76	47	1.85	105.5	4.15	0.85	1.87	5	A
NP7-6		7.0	151	5.94	34	1.34	97.5	3.84	1.26	2.78	1	A
NP8-6		8.0	151	5.94	50	1.97	97.5	3.84	1.70	3.75	1	A
NP10-6		10.0	151	5.94	50	1.97	97.5	3.84	1.90	4.19	1	A
NP12-6		12.0	151	5.94	50	1.97	97.5	3.84	2.08	4.58	1	A
NP1.2-12	12	1.2	97	3.82	48	1.89	54.5	2.15	0.57	1.26	3	A
NP2.3-12		2.3	178	7.01	34	1.34	64.0	2.52	0.94	2.07	1	A
NP4-12		4.0	90	3.54	70	2.76	105.5	4.15	1.67	3.68	1	A、B
NP5-12		5.0	90	3.54	70	2.76	106.0	4.17	2.00	4.41	1	A、B
NP7-12		7.0	151	5.94	65	2.56	97.5	3.84	2.50	5.51	4	A、B
NP12-12		12.0	151	5.94	98	3.86	97.5	3.84	4.00	8.82	4	B
NP17-12I		17.2	181	7.13	76	2.99	167.0	6.57	6.20	13.66	2	F
NP18-12B		17.2	181	7.13	76	2.99	167.0	6.57	6.20	13.66	2	C
NP24-12		24.0	175	6.89	166	6.54	125.0	4.92	8.65	19.05	2	C、F
NP26-12B		26.0	175	6.89	166	6.54	125.0	4.92	8.65	19.05	2	C
NP38-12		38.0	197	7.76	165	6.50	170.0	6.69	13.80	30.40	2	D、H
NP40-12		40.0	197	7.76	165	6.50	175.0	6.89	15.50	34.20	2	D、H
NP65-12		65.0	350	13.78	166	6.54	174.0	6.85	22.80	50.22	2	E、G

(NPH) 高率型—設計壽命 3 年〔High Rate Type - Designed Life is 3 Years for Floating Use〕

TYPE	Volts	Nominal Capacity (10 hr rate-AH)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
NPH2.3-12	12	2.3	178	7.01	34	1.34	64.0	2.52	0.94	2.07	1	A、B
NPH5-12		5.0	90	3.54	70	2.76	106.0	4.17	2.00	4.41	1	B
NPH12-12		12.0	151	5.94	98	3.86	97.5	3.84	4.00	8.82	4	B
NPH16-12T		16.0	181	7.13	76	2.99	167.0	6.57	6.20	13.66	2	C
NPH18-12		18.0	181	7.13	76	2.99	167.0	6.57	6.60	14.50	2	C、F

(NPW) 高率型(瓦特)—設計壽命 3 年〔High Rate Type(Watts) - Designed Life is 3 Years for Floating Use〕


TYPE	Volts	W/Cell 10min (F.V.1.67V/Cell)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
NPW45-6	6	45	151	5.94	34	1.34	97.5	3.84	1.26	2.78	1	A、B
NPW45-12	12	45	151	5.94	65	2.56	97.5	3.84	2.50	5.51	4	A、B

(RE) 長壽命—設計壽命 5 年〔Long Life Type - Designed Life is 5 Years for Floating Use〕


TYPE	Volts	Nominal Capacity (20 hr rate-AH)	Approx. Dimensions						Approx Weight		Layout	Terminals
			Length		Width		Overall height Incl.terminals		kg	lbs		
			mm	in	mm	in	mm	in				
RE7-6	6	7.0	151	5.94	34	1.34	97.5	3.84	1.26	2.78	1	A
RE5-12	12	5.0	90	3.54	70	2.76	106.0	4.17	2.00	4.41	1	A、B
RE7-12		7.0	151	5.94	65	2.56	97.5	3.84	2.50	5.51	4	B
RE12-12		12.0	151	5.94	98	3.86	97.5	3.84	4.00	8.82	4	B

Characteristics


**Battery Selection Chart
(NP / RE Batteries)**

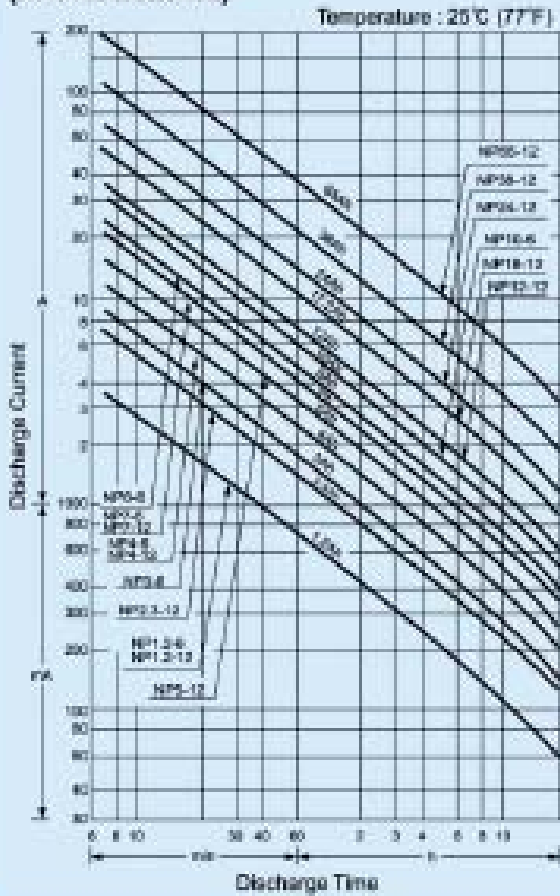


**Battery Selection Chart
(NPH / NPW / REW Batteries)**

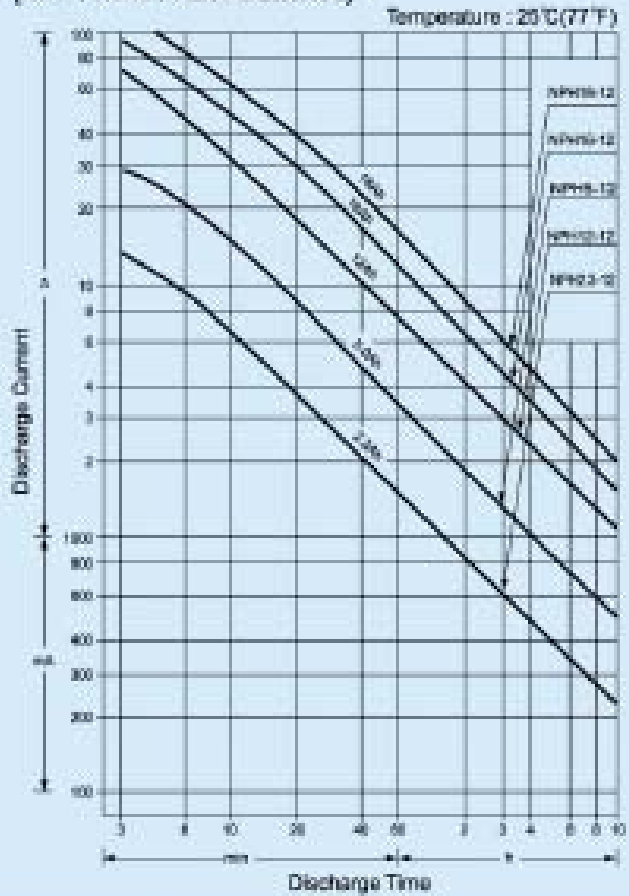


Discharge Characteristic Curves: NP / RE Batteries

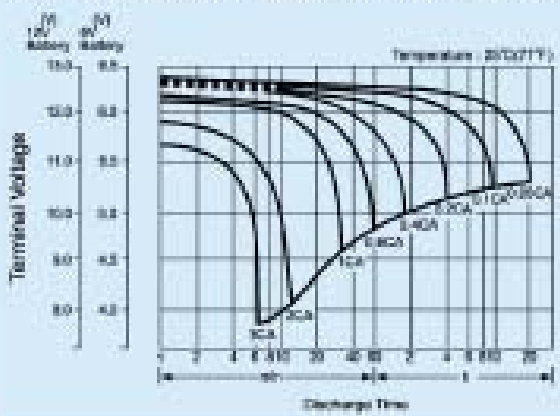


Discharge Characteristic Curves : NPH / NPW / REW Batteries

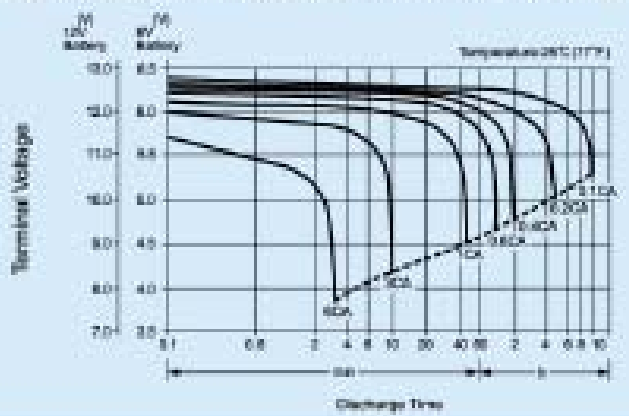

Float Service Life: NP / NPH / NPW / RE / REW

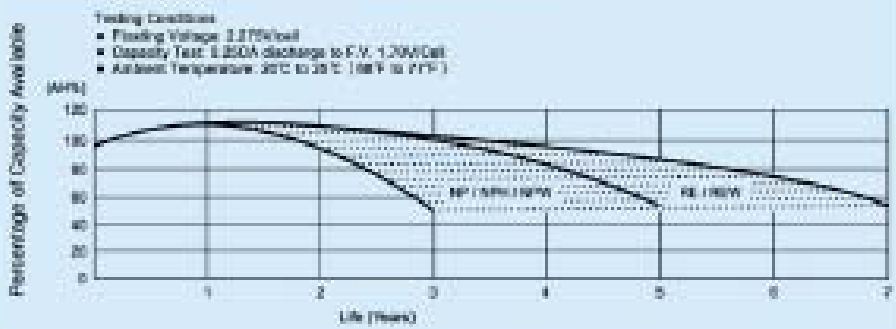


**Self Discharge Characteristics
(NP / NPH / NPW / RE / REW Batteries)**

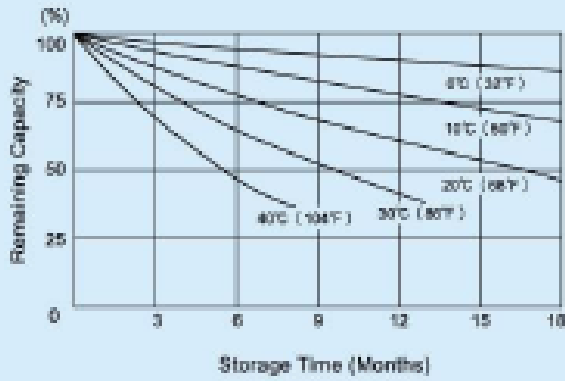







**Cycle Service Life in Relation to Depth of Discharge
(NP / NPH / NPW / RE / REW Batteries)**

Testing Conditions

- Discharge Current: 0.17C Amp (F.V. 1.7W/Cell)
- Charging Current: 0.08C Amp
- Charging Volume: 125% of Discharged Capacity
- Ambient Temperature: 20°C to 25°C (68°F to 77°F)

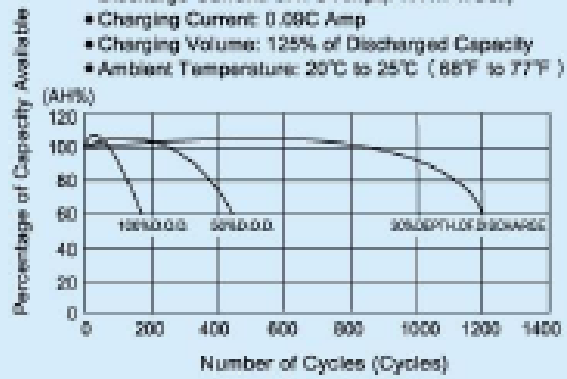

(NP / NPH / NPW / RE / REW Batteries)

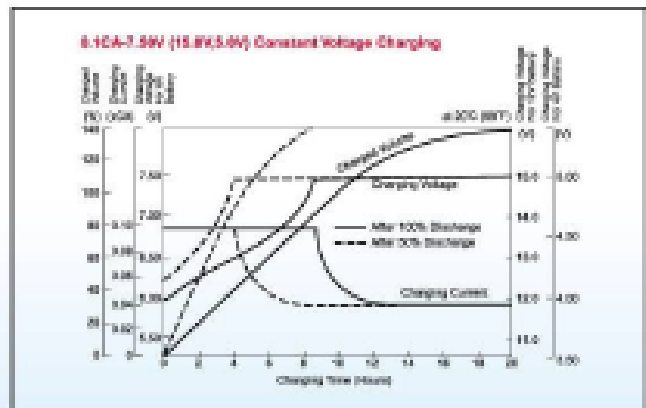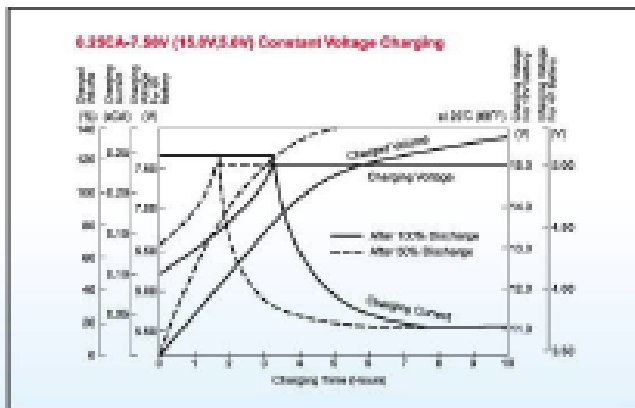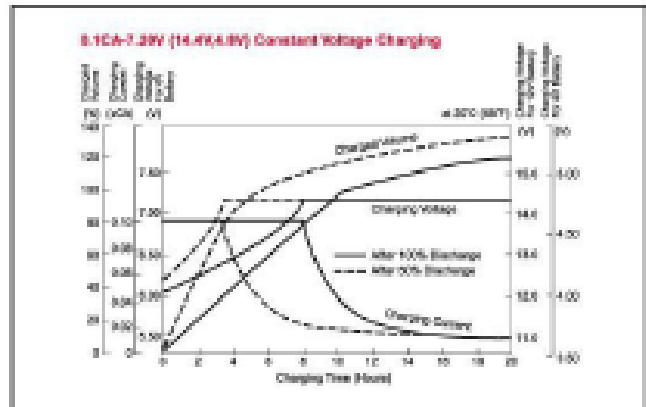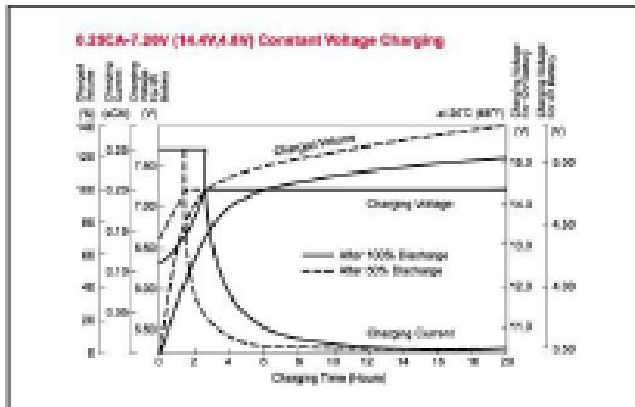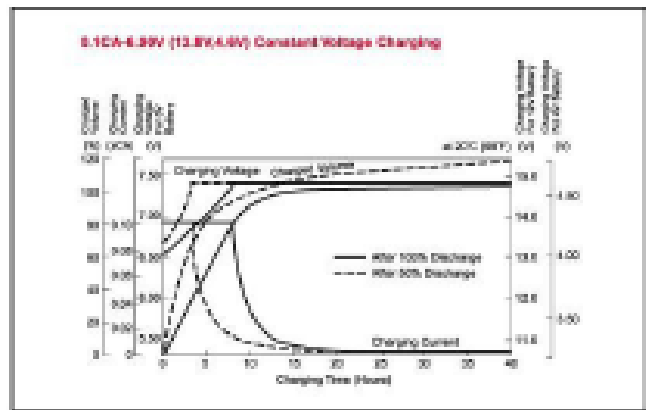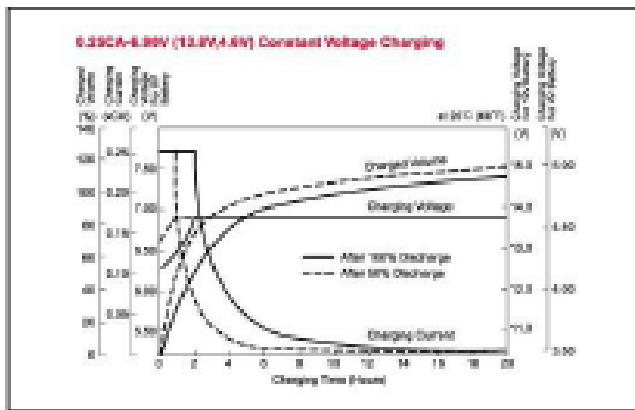



宜蘭廠 I-Lan Plant



新莊廠 Hsin Chuang Plant



廣州廠 Guang Zhou Plant

TAIWAN YUASA BATTERY CO., LTD. 台灣湯淺電池股份有限公司

總公司：台北縣新莊市福營路227巷11號

Hsin Chuang Plant : No.11 Lane 227, Fuying RD., Hsinchuang City, Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-29018261~4 FAX : 886-2-29039626

<http://www.yuasa.com.tw> E-mail:yua110@yuasa.com.tw

台中分公司：台中市南門路59巷91號

Taichung Branch : No.91 Lane 59, Nanmen RD., Taichung City, Taiwan, R.O.C.

TEL : 886-4-22873928 · 22873931 FAX : 886-4-22872001

E-mail:yuasa300@ms18.hinet.net

高雄分公司：高雄市新興區文化路55之6號

Kaohsiung Branch : No.55-6, Wenhua RD., Hsinhsing District, Kaohsiung City, Taiwan, R.O.C.

TEL : 886-7-2411133 (REP.) FAX : 886-7-282-7813

E-mail:yuasa400@ms18.hinet.net

宜蘭廠：宜蘭縣冬山鄉龍德工業區龍祥八路2號

I-Lan Plant : No.2, Lunghsiang 8th RD., Lungteh Industrial Zone, Tungshan Hsiang, Ilan Hsien, Taiwan, R.O.C.

TEL : 886-3-9902306 FAX : 886-3-9902243

E-mail:yua861@yuasa.com.tw

廣州廠：廣州經濟技術開發區東區駿業路255號

Guang Zhou Plant : No.255, Jun Ye Road, Eastern Section, Getdd, Guangdong, China

TEL : 86-20-82266301 FAX : 86-20-82267258

E-mail:toplitecheng@163.com